


BEEF BRISKET SAW


Models MG-1/ 1HS / 1B / 1BHS / 1BFQ

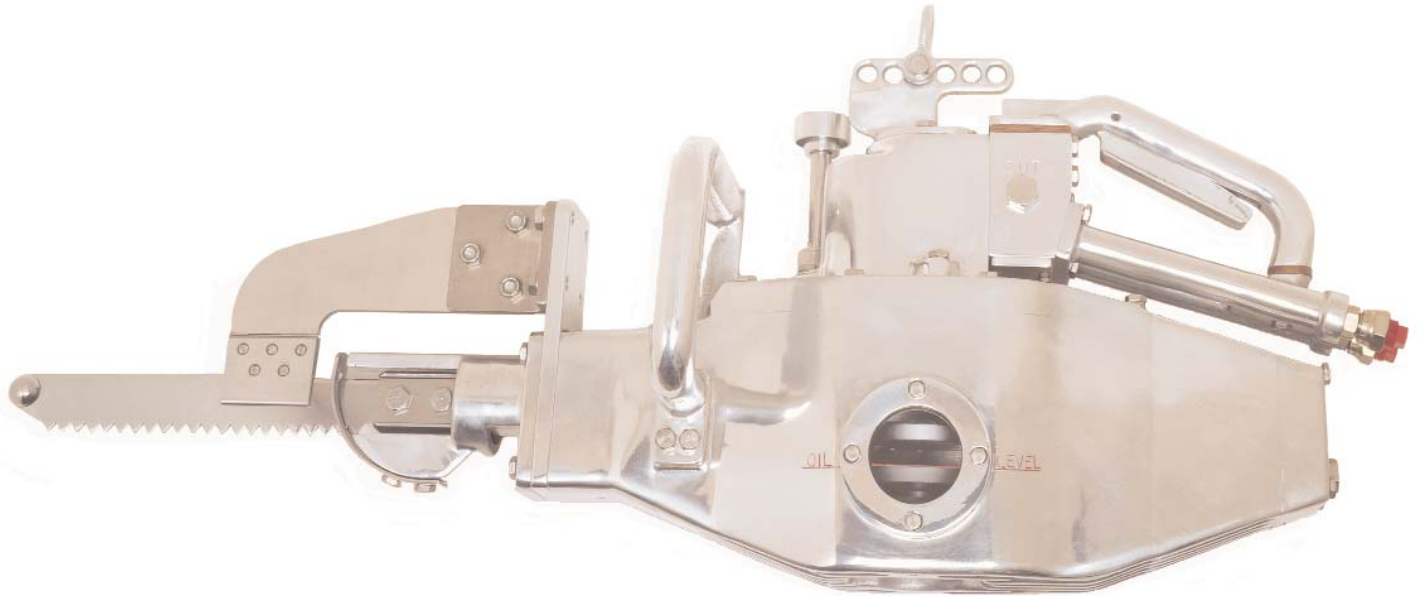

The Jarvis Models MG-1, MG-1HS, MG-1B, MG-1BHS and MG-1BFQ - hydraulic powered brisket saws for beef, hog splitting and forequartering.

JARVIS

- The powerful MG-1 cuts through all beef briskets quickly and easily. The high performance MG-1B is even faster, suitable for kills over 200 beef / hour. Models MG-1HS and MG-1BHS are ideal for hog splitting and hog brisket cutting. Model MG-1BFQ is the perfect saw for forequartering.
- The MG-1 and MG-1HS cuts fat cattle briskets in 5 seconds, the MG-1B, MG-1BHS and MG-1BFQS in 3 seconds.
- Small and maneuverable for optimum handling.
- A balanced drive system makes all MG-1 models smooth and quiet for less operator fatigue.
- Minimal maintenance due to the oil bath lubricated drive and no electrical components.
- Meets international requirements for safety and hygiene. USDA and CE approved.

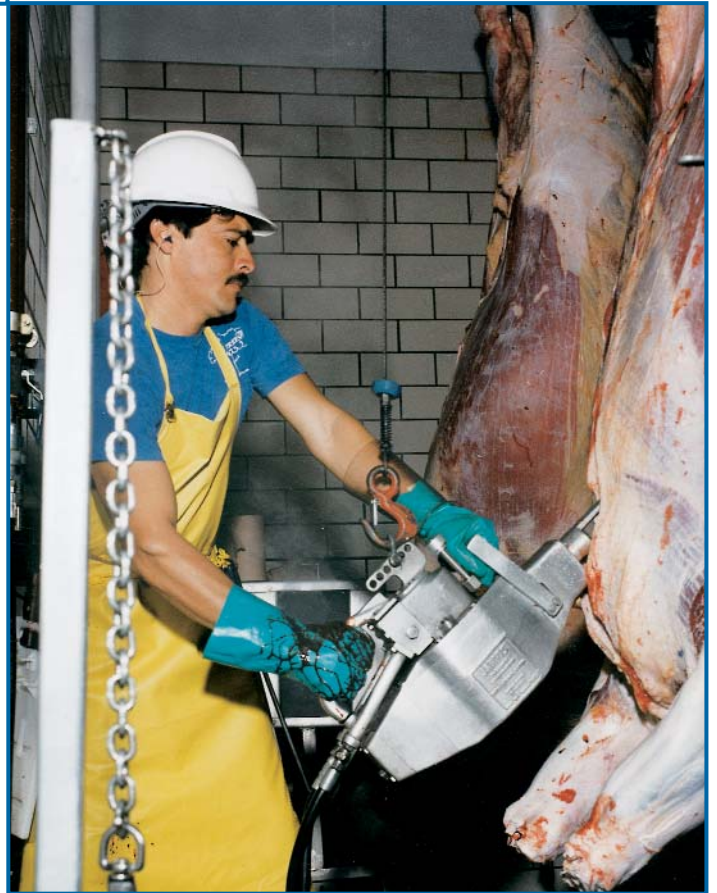

SMOOTH - FAST - DURABLE

BEEF BRISKET SAW

Model MG-1/ 1HS / 1B / 1BHS / 1BFQ

Specifications

Drive hydraulic

Model MG-1 / MG-1HS / MG-1B / MG-1BHS / MG-1BFQ

Cutting Cycle Time					
	MG-1, 1HS				5 sec
	MG-1B, 1BHS, 1BFQ				3 sec
Cut Speed at 3000 rpm (MG-1, 1HS)			12000 in / min		30480 cm / min
Cut Speed at 3500 rpm (MG-1B, 1BHS, 1BFQS)			14000 in / min		35560 cm / min
Control Handle			Single Trigger		Hydraulic
Blade Lengths					
	Hog Splitting	18.0 in	457 mm	Beef 9.5 in	240 mm
	Hog Splitting	22.0 in	559 mm	Beef 10.5 in	270 mm
	Forequartering	16 in	406 mm	Beef 11.5 in	290 mm
	Forequartering	18 in	457 mm	Beef 13.0 in	330 mm
Overall Length (with 9.5 in / 240 mm blade)			31 in		790 mm
Weight					
	MG-1, 1B		41 lbs		18.6 kg
	MG-1HS, 1BHS, 1BFQ		63 lbs		28.6 kg

Hydraulic Power Unit

Motor Power		5 hp	3728 W
Operating Voltage		460 / 230 V, 3 phase, 60 Hz	
		other voltages and 50 Hz available	
Hose Length		16 ft	5 m
Oil Capacity		20 gal	76 L
Overall Dimensions (l x w x h)		28 x 20 x 27.5 in	710 x 510 x 700 mm
Weight (without oil)		216 lbs	98 kg

Equipment Selection and Accessories

Order Number

Model MG-1				4005013
Model MG-1B				4005037
MG-1HS				4005012
MG-1BHS				4005039
MG-1BHS (Shower Head)				4005081
Model MG-1BFQ				4005131, 4005079, 4005085, 4005100
Blade (length), MG-1,1B				
		9.5 in	240 mm	1023083
		10.5 in	270 mm	1023084
		11.5 in	290 mm	1023215
		13.0 in	330 mm	1023230
		18.0 in	457 mm	1023088
Blade (length), MG-1HS, MG-1BHS				
		21.9 in	556 mm	1023090
Blade (length), MG-1FQ				
	3 teeth per inch	16.3 in	414 mm	1023577
	3 teeth per inch	18.0 in	457 mm	1023088
	3 teeth per inch (alternating)	16 in	406 mm	1023562
	3 teeth per inch (alternating)	18 in	457 mm	1023631
	4 teeth per inch	16.3 in	414 mm	1023590
	5 teeth per inch	16.3 in	414 mm	1023591
	HD	21.9 in	556 mm	1023552
Hydraulic Power Unit with hydraulic hoses, 230 / 460 V, 3 phase, 60 Hz*				
	Model MG-1, 1HS, 3.1 gpm (11.7 lpm) output			4027279
	Model MG-1B, 1BHS, 1BFQ, 5 gpm (18.9 lpm) output			4027265
Balancer				
			MG-1, MG-1B	4042035
			MG-1HS, MG-1BHS, MG-1BFQ	4042047



* For other configurations: please specify voltage, hertz, and intended country of operation when ordering.

Products for the meat and poultry industry

Jarvis Products Corporation · 33 Anderson Road · Middletown, CT 06457-4926 · United States of America
 Telephone (860) 347-7271 · Fax (860) 347-9905 · jarvis.products.corp@snet.net · www.jarvisproducts.com