


# SPINAL CORD SHEATH and MIS-SPLIT REMOVER

## Model SHC 165G

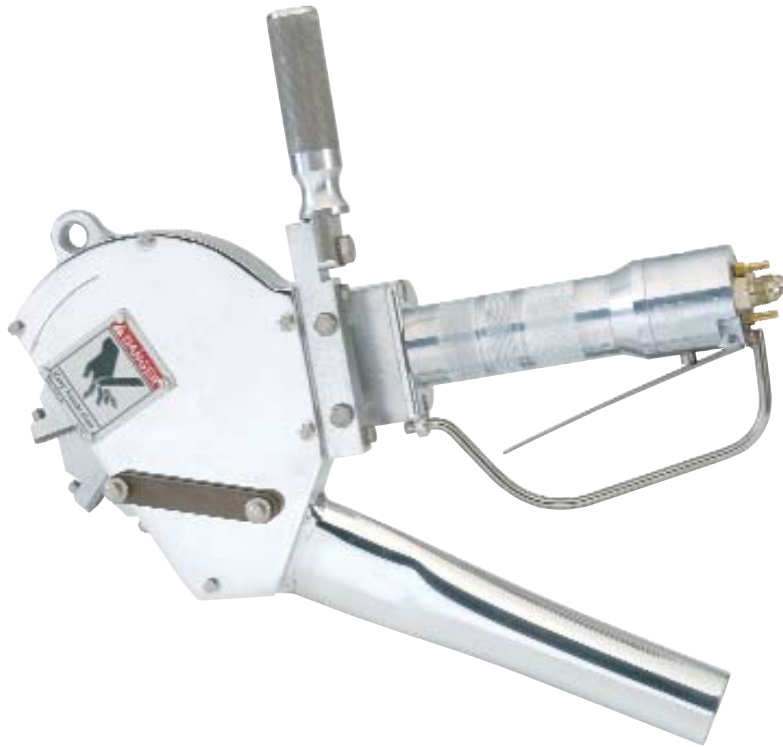

U.S. Patents  
6,805, 696  
6,511,483  
European Patent No.  
EP 0 890 313 B1

### The Jarvis Model SHC 165G - spinal cord and mis-split remover for beef or pork.

- Latest patented technology for grinding away BSE risk material, including the spinal cord, which is under the mis-split, and the meninges (spinal cord).
- Connected to a vacuum system that collects removed spinal cord material for disposal.
- Lightweight, powerful (2.5 hp) hydraulic motor - no bogging down or motor icing; low noise and instant stop.
- Heavy duty gears made to withstand the extreme conditions found in larger meat processing plants.
- Rugged construction provides unsurpassed durability.
- Meets national and international requirements for hygiene and safety.

# JARVIS



**THE SHC SAWS - ULTIMATE POWER, EXCELLENT HANDLING**

# SPINAL CORD SHEATH and MIS-SPLIT REMOVER

## Model SHC 165G

Specifications		
----------------	--	--

Drive		Hydraulic
-------	--	-----------

### Model SHC 165G

Motor Power	2.5 hp	1865 W
Blade Speed at 3.5 gpm		2725 rpm
Control Handle	Dual Anti-Tie Down	Pneumatic
Cutter Head Width		
Pork	0.51 in	13 mm
Beef	0.63 in	16 mm
Cutting Depth (maximum)		
0.51 in / 13 mm wide blade - pork	0.81 in	20.6 mm
0.63 in / 16 mm wide blade - beef	0.88 in	22.4 mm
Vacuum at 14 in Hg (190 in H <sub>2</sub> O)	320 ft <sup>3</sup> / min	9.06 m <sup>3</sup> / min
Overall Length	15.0 in	381 mm
Weight	8.6 lbs	3.9 kg

### Hydraulic Power Unit

Motor Power	5 hp	3728 W
Operating Voltage	all voltages and 50 Hz available	
Hose Length	16 ft	5 m
Oil Capacity	20 gal	76 L
Overall Dimensions (w x l x h)	31.5 x 25.4 x 29.9 in	800 x 645 x 759 mm
Weight (without oil)	250 lbs	113 kg

Equipment Selection and Accessories	Order Number
-------------------------------------	--------------

Model SHC 165G	
Complete Tool, 0.51 in / 13 mm wide blade	4007077
Complete Tool, 0.63 in / 16 mm wide blade	4007089
Hydraulic Power Unit with hydraulic hoses and control box	
Single Trigger, 460 V	4027271
Single Trigger, 575 V	4027283
Dual Trigger, 460 V	4027273
Single Trigger, 380 V	4027274
Dual Trigger, 380 V	4027264
Cutter Heads	
0.51 in / 13 mm blade	1023549
0.63 in / 16 mm blade	1023550
Balancer	4042044



Products for the meat and poultry industry